

STANDARD TEMPERATURE SENSORS



■ STANDARD PLATINUM RESISTANCE THERMOMETERS ■ STANDARD PLATINUM-COBALT RESISTANCE THERMOMETER FOR CRYOGENIC TEMPERATURE

These are standard temperature sensors conforming to the International Temperature Scale of 1990.

The temperature range from 4 K to 962 °C is measured by these sensors which are classified into a standard platinum-cobalt resistance thermometer for cryogenic temperature, standard platinum resistance thermometers for low temperature, medium temperature and high temperature.

The R800 series standard platinum resistance thermometers, which have been commercialized under the guidance of the NMIJ, have been adopted by national metrology institute in overseas countries with reputation on their performance and reliability.



MODEL R800-0

■ FEATURES

● These sensors are manufactured with selected quality materials by highly skilled manufacturing techniques under the guidance of NMIJ.

● The standard platinum resistance thermometer for low temperature is the first international product in Japan as the standard thermometer applicable to 13 K.


● The standard platinum resistance thermometers for medium temperature and for high temperature have been delivered to national measurement institute in overseas countries in large quantities. Its performance has been highly reputed in Comité Consultatif de Thermométrie (CCT).

● The standard platinum-cobalt resistance thermometer for cryogenic temperature features excellent reproducibility and stability in a cryogenic temperature range below to 4 K.



MODEL R800-2

■ LIST OF STANDARD TEMPERATURE SENSORS

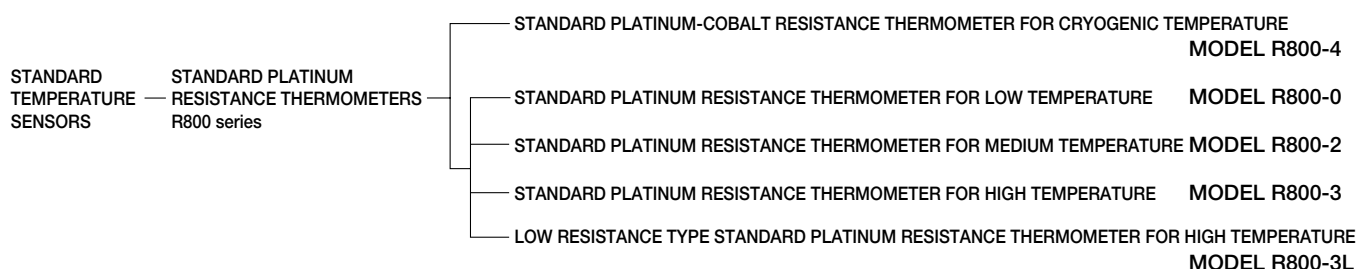

STANDARD PLATINUM RESISTANCE THERMOMETER FOR LOW TEMPERATURE (CAPSULE TYPE)

MODEL R800-0



MODEL R800-0

This thermometer is designed as a capsule type standard temperature sensor covering the temperature range from 13.8033 K (-259.3467 °C triple point of equilibrium hydrogen) to 30 °C.

FEATURES


- Conforms to the specifications of ITS-90 (International Temperature Scale of 1990)
- The adoption of the strain-free double coil system structure in a sensing part and CHINO's unique manufacturing techniques have realized excellent reproducibility and stability of the thermometer for a long time.

GENERAL SPECIFICATIONS

- MEASURING TEMPERATURE RANGE : 13 K to 30 °C
- RESISTANCE VALUE : 25.5 ± 1 Ω (at 0 °C)
- SPECIFIED CURRENT : 1 mA
- TEMPERATURE CHARACTERISTIC : $R(-38.8344\text{ °C}) / R(0.01\text{ °C}) \leq 0.844235$
- SENSITIVITY : 0.1 Ω / K
- SELF-HEATING : Approx. 1 mK / 1 mA
- SEALED GAS : Helium gas
- CONNECTING LEAD WIRE : 4-conductor type platinum wire Ø 0.3 mm X 40 mm
- FRAME : Cross quartz
- PROTECTING TUBE : Capsule type platinum sheath Ø 5 mm X 43 mm

CONSTRUCTION

An element made by winding a platinum resistance wire onto a cross quartz frame by the double coil system is accommodated a platinum-sheathed capsule, and connecting lead wires are led through the metal glass sealing.

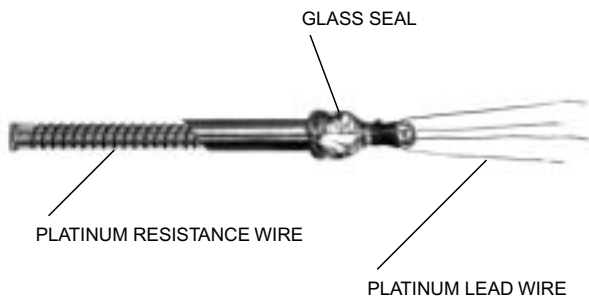

CALIBRATION

For applying this thermometer as a standard temperature sensor, the temperature-resistance value table must be prepared by calibrating it. CHINO will prepare a temperature-resistance value table at CHINO's standard laboratory if requested. (Calibration charge is separately asked.)

CALIBRATION TEST (CRYOGENIC CALIBRATION TEST L-5)

CALIBRATION POINT

- : Triple point of water (273.16 K)
- * Equivalent to triple point of mercury (234.3156 K)
- * Equivalent to triple point of argon (83.8058 K)
- * Equivalent to triple point of oxygen (54.3584 K)
- * Equivalent to triple point of neon (24.5561 K)
- * Equivalent to boiling point of equilibrium hydrogen (20.2711 K)
- * Equivalent to 17.035 K point of equilibrium hydrogen (17.035 K)
- * Equivalent to triple point of equilibrium hydrogen (13.8033 K)


CALIBRATION UNCERTAINTY : ± 0.1 K

- * By comparison calibration

TEMPERATURE-RESISTANCE VALUE TABLE

The temperature-resistance value table will be prepared by interpolating scales at intervals of 1 K between 13 K and 0 °C according to the calibrated values in the calibration test.

EXTERNAL DIMENSIONS

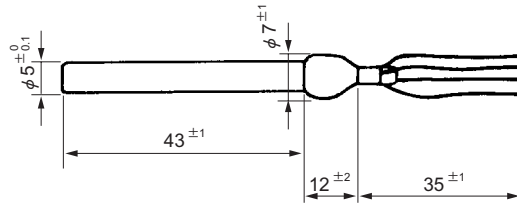

Unit : mm

*The lead wire section size may change more or less.

STANDARD PLATINUM RESISTANCE THERMOMETER FOR MEDIUM TEMPERATURE (STEM TYPE)

MODEL R800-2



MODEL R800-2

This thermometer is designed as a stem type standard temperature sensor with a quartz protecting tube covering the temperature range from 73 K to 933.473 K (660.323 °C, freezing point of aluminum).

FEATURES


- Conforms to the specifications of ITS-90 (International Temperature Scale of 1990).
- The adoption of the strain-free double coil system structure in a sensing part and CHINO's unique manufacturing techniques have realized excellent reproducibility and stability of the thermometer for a long time.
- The unique structure including a convection preventive plate and a delustered surface finish protecting tube have reduced an error caused by thermal radiation, thermal conduction, and others.

GENERAL SPECIFICATIONS

- MEASURING TEMPERATURE RANGE : 73 K to 661 °C
- RESISTANCE VALUE : 25.5 Ω ± 1 Ω (at 0 °C)
- SPECIFIED CURRENT : 1 mA
- TEMPERATURE CHARACTERISTIC : $R(29.7646\text{ °C}) / R(0.01\text{ °C}) \geq 1.11807$
- SENSITIVITY : 0.1 Ω / K
- SELF-HEATING : Approx. 2 mK / 1 mA
- SEALED GAS : Mixture gas (argon and oxygen)
- CONNECTING INTERNAL LEAD WIRE : Platinum wire
- CONNECTING EXTERNAL LEAD WIRE : 4-conductor cable cord 2 m with gold-plated terminals
- FRAME : Cross quartz
- PROTECTING TUBE : Delustered quartz tube (∅7.0 ± 0.5) mm X 600 mm

CONSTRUCTION

An element made by winding a platinum resistance strand onto a cross quartz frame by the double coil system is accommodated into a quartz tube. The interior of the protecting tube is composed of the element, convection preventive plate, spacer, internal lead wire, etc., and 4-conductor external leads have gold-plated terminals.

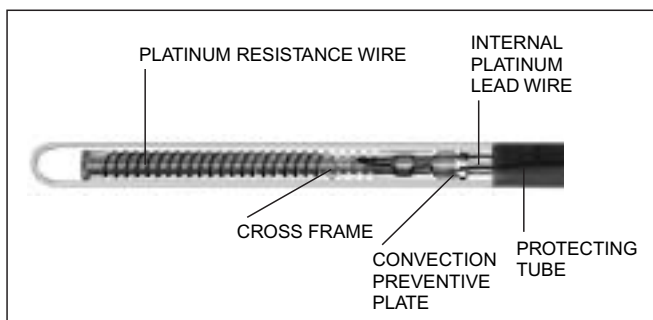

CALIBRATION

For applying this thermometer as a standard temperature sensor, the temperature-resistance value table must be prepared by calibrating it. CHINO will prepare the temperature-resistance value table at CHINO's standard laboratory if requested. (Calibration charge is separately asked.)


CALIBRATION TEST (FIXED POINT CALIBRATION TEST F-1)

CALIBRATION POINT	
: Freezing point of aluminum	(660.323 °C)
Freezing point of zinc	(419.527 °C)
Freezing point of tin	(231.928 °C)
Triple point of water	(0.01 °C)
CALIBRATION UNCERTAINTY	: ± 0.01 K

TEMPERATURE-RESISTANCE VALUE TABLE

The temperature-resistance value table will be prepared by interpolating the $R(t)$ values between 0 °C and 661 °C at intervals of 1 K according to the calibrated values in the calibration test.

EXTERNAL DIMENSIONS

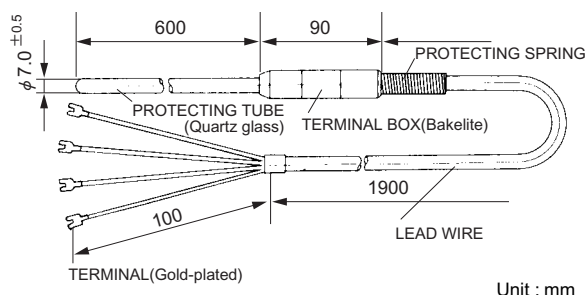

STANDARD PLATINUM RESISTANCE THERMOMETER FOR HIGH TEMPERATURE (STEM TYPE)

MODEL R800-3



MODEL R800-3

This thermometer using a high purity platinum wire with a large diameter as a temperature sensing wire is designed as a stem type standard temperature sensor covering the temperature from 273.15 K (0 °C) to 1234.93K (961.78 °C, freezing point of silver).

FEATURES

- Conforms to the specifications of ITS-90 (International Temperature Scale of 1990).
- The adoption of the strain-free double coil system structure in a sensing part and CHINO's unique manufacturing processing techniques have realized excellent reproducibility and stability of the thermometer for a long time.
- A long quartz protecting tube is suitable for high-temperature measurement.

GENERAL SPECIFICATIONS

- MEASURING TEMPERATURE RANGE : 0 °C to 962 °C
- RESISTANCE VALUE : 2.55 Ω ± 0.1 Ω (at 0 °C)
- SPECIFIED CURRENT : 1 mA
- TEMPERATURE CHARACTERISTIC : $R(29.7646\text{ °C}) / R(0.01\text{ °C}) \geq 1.11807$ and $R(961.78\text{ °C}) / R(0.01\text{ °C}) \geq 4.2844$
- SENSITIVITY : 0.01 Ω / K
- SELF-HEATING : Approx. 0.2 mK / 1 mA
- SEALED GAS : Mixture gas (argon and oxygen)
- CONNECTING INTERNAL LEAD WIRE : Platinum lead wire
- CONNECTING EXTERNAL LEAD WIRE : 4-conductor cable cord 2 m with gold-plated
- FRAME : Cross quartz
- PROTECTING TUBE : Delustered quartz tube (Ø7.0 ± 0.5) mm X 700 mm

CONSTRUCTION

An element made by winding a platinum resistance strand onto a cross quartz frame by the double coil system is accommodated into a quartz tube.

The interior of the protecting tube is composed of the element, convection protective plate, spacer, internal lead wire, etc. and 4-conductor external leads have gold-plated terminals.

CALIBRATION

For applying this sensor as a standard thermometer, the temperature-resistance value table must be prepared by calibrating it. CHINO will prepare the temperature-resistance value table at CHINO's standard laboratory if requested. (Calibration charge is separately asked.)

STANDARD PLATINUM RESISTANCE THERMOMETER FOR HIGH TEMPERATURE (STEM TYPE)

MODEL R800-3L



MODEL R800-3L

This thermometer using a high purity platinum wire with a large diameter as a temperature sensing wire is designed as a stem type standard temperature sensor covering the temperature range from 273.15 K (0 °C) to 1234.93 K (961.78 °C, freezing point of silver).

FEATURES


- Conforms to the specifications of ITS-90 (International Temperature Scale of 1990).
- The adoption of the strain-free single coil system structure in a sensing part and CHINO's unique manufacturing processing techniques have realized excellent reproducibility and stability of the thermometer for a long time.
- As a low resistance type platinum wire being suitable for high temperature measurement is used, the influence of insulation resistance is very low.

GENERAL SPECIFICATIONS

- MEASURING TEMPERATURE RANGE : 0 °C to 962 °C
- RESISTANCE VALUE : 0.25 Ω ± 0.01 Ω (at 0 °C)
- SPECIFIED CURRENT : 1 to 10 mA
- TEMPERATURE CHARACTERISTIC : $R(29.7646\text{ °C}) / R(0.01\text{ °C}) \geq 1.11807$ and $R(961.78\text{ °C}) / R(0.01\text{ °C}) \geq 4.2844$
- SENSITIVITY : 1 mΩ / K
- SELF-HEATING : Approx. 0.02 mK / 1 mA
- SEALED GAS : Mixture gas (argon and oxygen)
- CONNECTING INTERNAL LEAD WIRE : Platinum lead wire
- CONNECTING EXTERNAL LEAD WIRE : 4-conductor cable cord 2 m with gold-plated
- FRAME : Cross quartz
- PROTECTING TUBE : Delustered quartz tube (Ø7.0 ± 0.5) mm X 700 mm

CONSTRUCTION

An element made by winding a platinum resistance strand onto a cross quartz frame by the single coil system is accommodated into a quartz tube. The interior of the protecting tube is composed of the element, convection preventive plate, spacer, internal lead wire, etc., and 4-conductor external leads have gold-plated terminals.

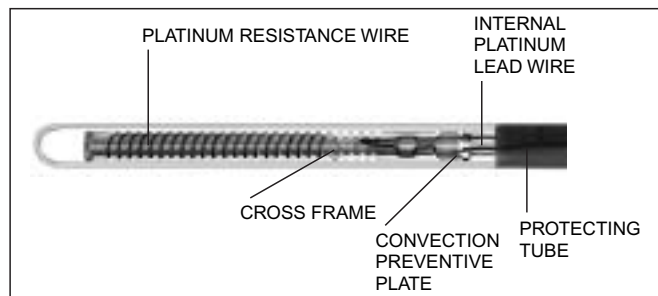

CALIBRATION

For applying this thermometer as a standard temperature sensor, the temperature-resistance value table must be prepared by calibrating it. CHINO will prepare the temperature-resistance value table at CHINO's standard laboratory if requested. (Calibration charge is separately asked.)

● **CALIBRATION TEST (FIXED POINT CALIBRATION TEST F-0)**

CALIBRATION POINT


: Freezing point of silver	(961.78 °C)
Freezing point of aluminum	(660.323 °C)
Freezing point of zinc	(419.527 °C)
Freezing point of tin	(231.928 °C)
Triple point of water	(0.01 °C)

CALIBRATION UNCERTAINTY : ± 0.06 °C

● **TEMPERATURE-RESISTANCE VALUE TABLE**

The temperature-resistance value table will be prepared by interpolating the $R(t)$ values between 660 °C and 962 °C at intervals of 1 K according to the calibrated values in the calibration test.

■ **EXTERNAL DIMENSIONS**

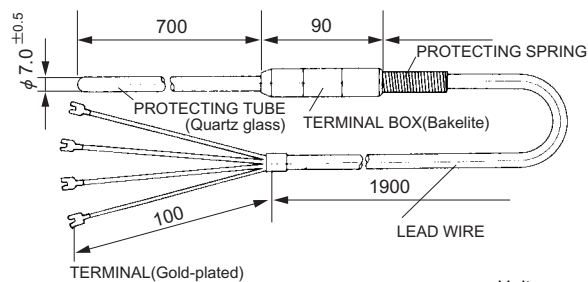

Unit : mm

MODEL R800-4

STANDARD PLATINUM-COBALT RESISTANCE THERMOMETER FOR CRYOGENIC TEMPERATURE (CAPSULE TYPE)

MODEL R800-4



MODEL R800-4

This thermometer is designed as a standard temperature sensor covering from 4 K to 13 K. It adopts platinum-cobalt rarefied alloy as a temperature sensing wire.

The platinum-cobalt rarefied alloy is made by alloying precious metal platinum with infinitesimal magnetic element cobalt, and it features a considerably high resistance and sensitivity in a cryogenic temperature range, as compared with pure metals. A platinum-cobalt resistance thermometer (Model R800-7) for industrial use is prepared, too.

■ **FEATURES**

- A single sensor covers temperature range from 4 K to 0 °C
- Stable sensitivity (resistance change ratio).
- Double coil type temperature sensing structure features very excellent reproducibility of the thermometer.
- Excellent responsibility owing to sealed helium gas.

■ **GENERAL SPECIFICATIONS**

MEASURING TEMPERATURE RANGE

4 K to 0 °C

TEMPERATURE SENSING ELEMENT

: Platinum-cobalt rarefied alloy (Pt-0.5 mol%Co)

RESISTANCE VALUE

: 100 Ω ± 4 Ω (at 0 °C)

MEASURING CURRENT

: 1 mA

SENSITIVITY : Min. 0.09 Ω / K (at 12 K)

Max. 0.4 Ω / K

SELF-HEATING : Approx. 2 mK / 1 mA in LN₂

SEALED GAS : Helium gas

LEAD WIRE : 4-conductor platinum wire Ø 0.3 mm X 40 mm


FRAME : Cross quartz

PROTECTING TUBE

: Capsule type platinum sheath Ø 5 mm X 43 mm

■ **CONSTRUCTION**

An element made by winding a platinum-cobalt resistance wire onto a cross quartz frame by the double coil system is accommodated into a platinum-sheathed capsule, and connecting lead wires are led through the metal glass sealing.

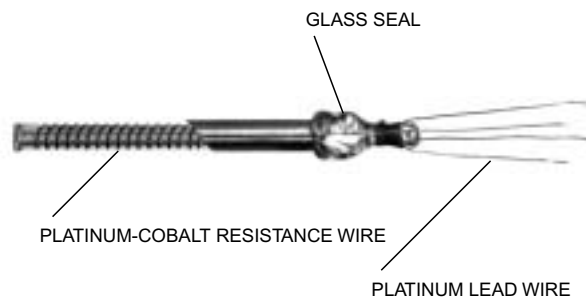


■ **CALIBRATION**

For applying this sensor as a standard thermometer, the temperature-resistance value table must be prepared by calibrating it. CHINO will prepare the temperature-resistance value table at CHINO's standard laboratory if requested. (Calibration charge is separately asked.)

CALIBRATION TEMPERATURE: 4 K to 0 °C or 14 K to 0 °C (CRYOGENIC CALIBRATION TEST L-3, 4)

■ **EXTERNAL DIMENSIONS**

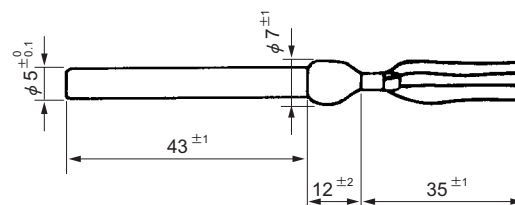


Unit : mm

*The lead wire section size may change more or less.

REFERENCES

■ STANDARD TEMPERATURE SENSORS

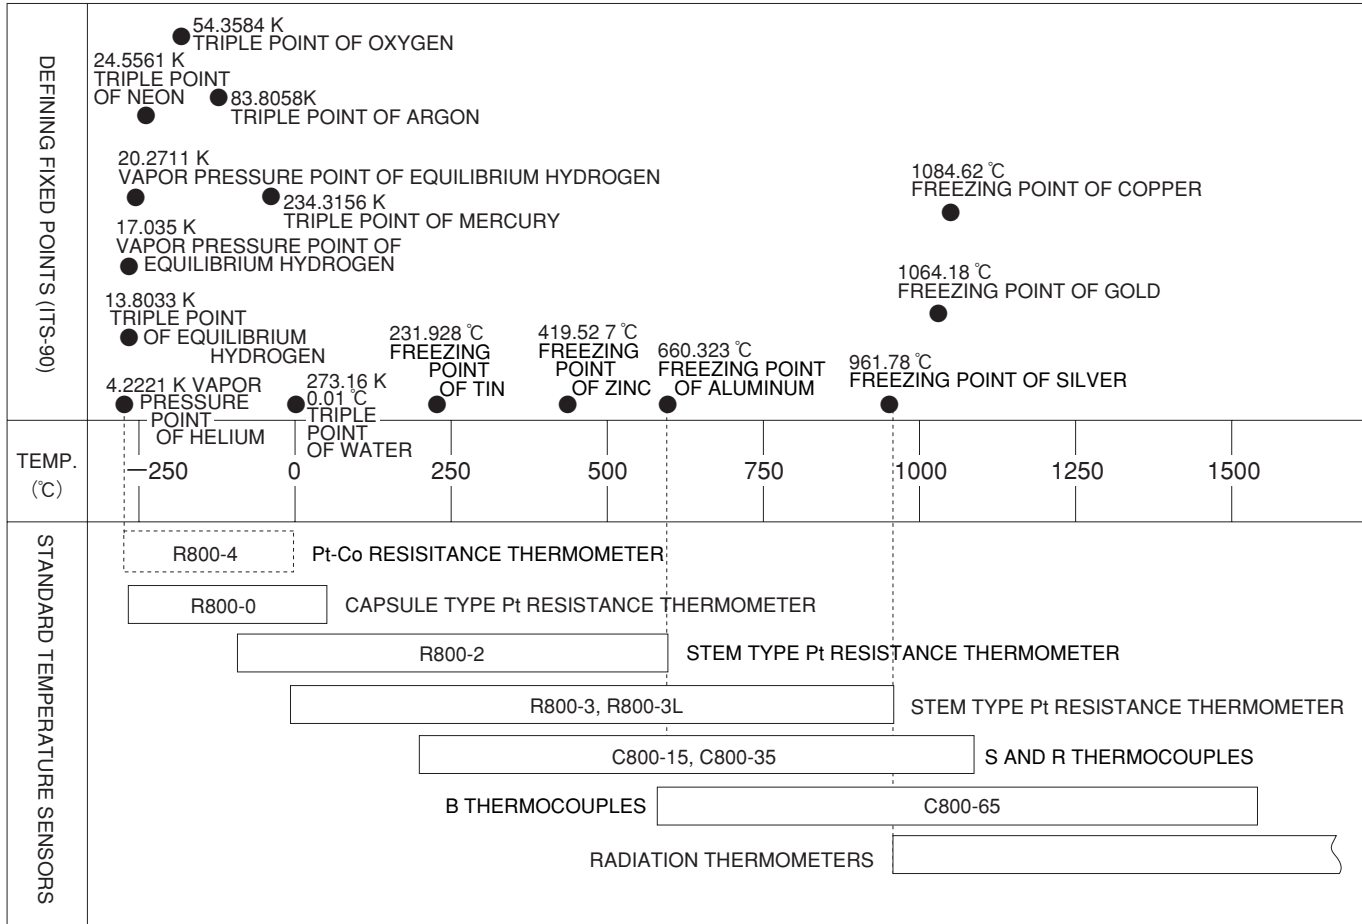

Specifications subject to change without notice. Printed in Japan (I) 2013. 7

CHINO CORPORATION

32-8 KUMANO-CHO, ITABASHI-KU, TOKYO 173-8632
 Telephone : +81-3-3956-2171
 Facsimile : +81-3-3956-0915
 E-mail : inter@chino.co.jp
 Website : www.chino.co.jp/